



**SPC TRADING COMPANY**

Trading industrial's equipment & Agriculture's machinery


**TODAY POWER - FUTURE TECHNOLOGY**

[www.spc-trading.com](http://www.spc-trading.com)

S t a i n l e s s S t e e l S u b m e r s i b l e B o r e h o l e P u m p

S t a i n l e s s S t e e l S u b m e r s i b l e B o r e h o l e P u m p

S t a i n l e s s S t e e l S u b m e r s i b l e B o r e h o l e P u m p

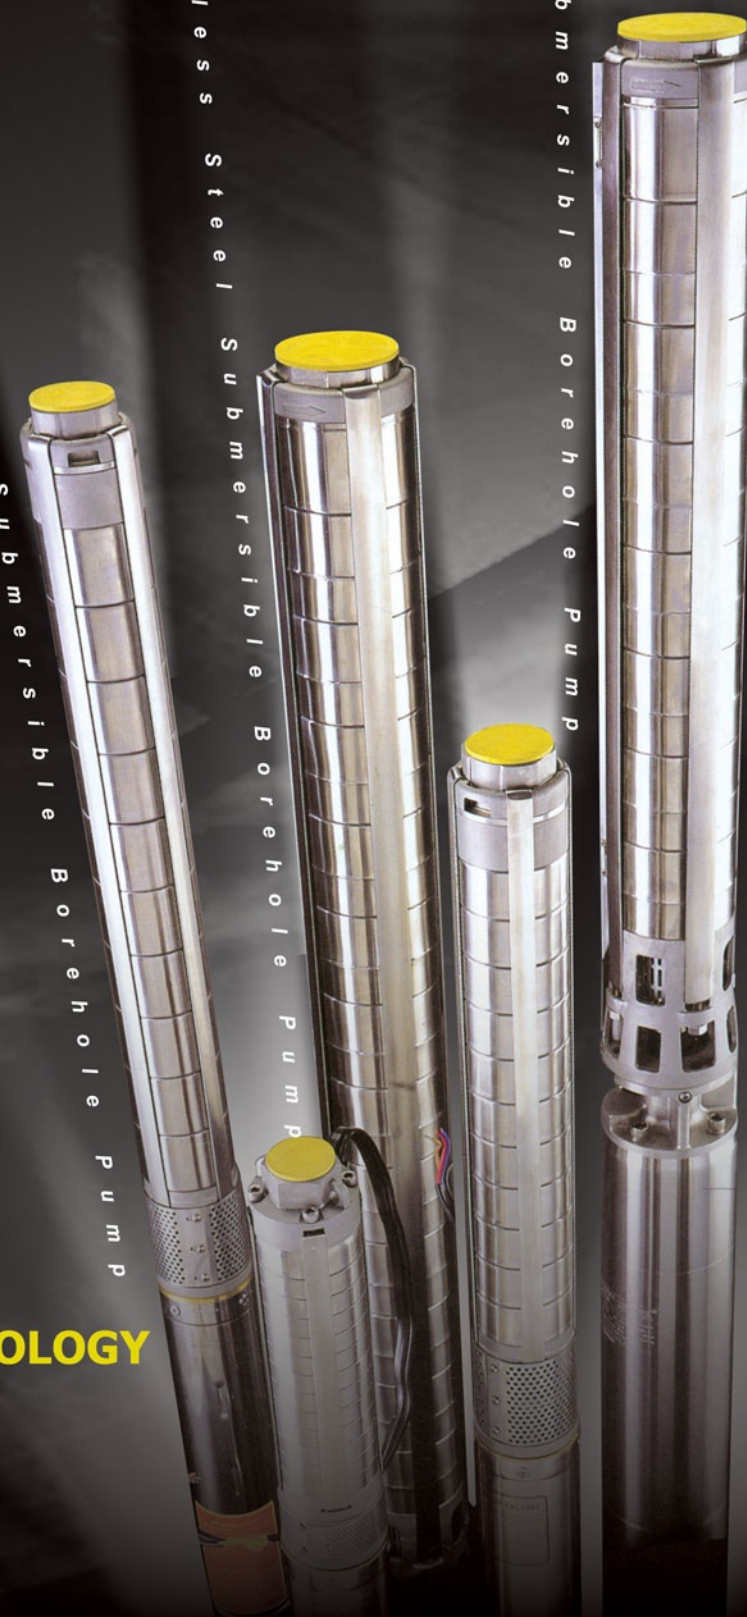


# The Casting Stainless Steel Submersible Borehol Pumps

www.spc-trading.com

Model	Power		Head. (meter)	Delivery (m <sup>3</sup> /h)	STD (Nema) (motor)	Outlet (inch)	Application
	(KW)	(HP)					
SP6CS 20/10	5.5	7.5	96-18	5-30	4"	2½"	Stainless Steel Impeller
SP6CS 20/13	7.5	10	117-25	5-30	6"	2½"	
SP6CS 20/17	9.2	12.5	150-32	5-30	6"	2½"	
SP6CS 20/20	11	15	178-37	5-30	6"	2½"	
SP6CS 30/6	5.5	7.5	60-8	8-46	6"	3"	
SP6CS 30/8	7.5	10	80-9	8-46	6"	3"	
SP6CS 30/13	11	15	128-16	8-46	6"	3"	
SP6CS 30/21	18.5	25	208-30	8-46	6"	3"	
SP6CS 46/5	7.5	10	62-7	10-60	6"	3"	
SP6CS 46/6	9.2	12.5	75-8	10-60	6"	3"	
SP6CS 46/7	11	15	85-9	10-60	6"	3"	
SP6CS 46/9	15	20	110-15	10-60	6"	3"	
SP6CS 46/12	18.5	25	147-17	10-60	6"	3"	
SP6CS 46/15	22	30	178-18	10-60	6"	3"	
SP6CS 60/4	7.5	10	52-15	15-70	6"	3"	
SP6CS 60/5	9.2	12.5	65-17	15-70	6"	3"	
SP6CS 60/6	11	15	78-19	15-70	6"	3"	
SP6CS 60/8	15	20	105-25	15-70	6"	3"	
SP6CS 60/10	18.5	25	128-32	15-70	6"	3"	
SP6CS 60/12	22	30	152-38	15-70	6"	3"	
SP8CS 80/3	11	15	74-20	30-120	6"	5"	
SP8CS 80/4	15	20	85-23	30-120	6"	5"	
SP8CS 80/5	18.5	25	110-26	30-120	6"	5"	
SP8CS 80/6	22	30	125-30	30-120	6"	5"	
SP8CS 80/7	30	40	145-35	30-120	6"	5"	
SP8CS 80/8	30	40	160-40	30-120	6"	5"	
SP8CS 80/9	30	40	180-45	30-120	8"	5"	
SP8CS 80/11	37	50	220-55	30-120	8"	5"	
SP8CS 80/13	55	75	250-70	30-120	8"	5"	
SP8CS 100/6	30	40	128-30	35-130	8"	5"	
SP8CS 100/8	37	50	168-45	35-130	8"	5"	
SP8CS 100/10	45	60	225-65	35-130	8"	5"	
SP8CS 100/12	55	75	250-80	35-130	8"	5"	
SP8CS 100/16	75	100	350-120	35-130	8"	5"	

**SPCS** model

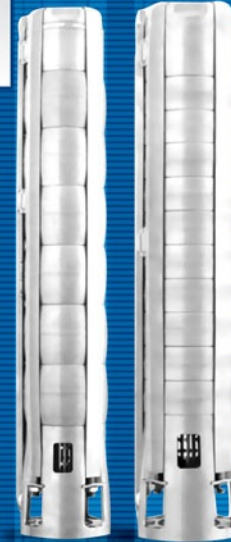

**6SP46****6SP17-30**

Model	POWER (hp)	Q Max. (m <sup>3</sup> /h)	H Max. (m)	Speed (r.p.m)	Outlet (inch)	Application
6SP17-9A	7.5	21-17-9	51-67-95	2850	3"	Stainless Steel Impeller
6SP17-12A	10	21-17-9	70-90-128	2850	3"	
6SP17-15A	12.5	21-17-9	86-112-158	2850	3"	
6SP17-18A	15	21-17-9	103-134-190	2850	3"	
6SP30-8A	10	36-30-12	44-61-85	2850	3"	
6SP30-10A	12.5	36-30-12	55-76-106	2850	3"	
6SP30-13A	15	36-30-12	72-99-138	2850	3"	
6SP30-17A	20	36-30-12	94-129-181	2850	3"	
6SP30-20A	25	36-30-12	110-152-212	2850	3"	
6SP46-7A	15	60-46-18	35-56-85	2850	3"	
6SP46-10A	20	60-46-18	50-80-121	2850	3"	
6SP46-13A	25	60-46-18	65-107-160	2850	3"	
6SP46-15A	30	60-46-18	75-120-182	2850	3"	

**6SP model**

[www.spc-trading.com](http://www.spc-trading.com)

## Stainless Steel Submersible Borehole Pumps

**SPSB model**

Model	Power (KW) (HP)	Head. (meter)	Delivery (m <sup>3</sup> /h)	STD (Nema) (motor)	Outlet (inch)	Application
SP4SB 3/9	0.55 (0.75)	51-20	1.2-4	4"	1 1/4"	Stainless Steel Impeller
SP4SB 3/15	1.1 (1.5)	85-34	1.2-4	4"	1 1/4"	
SP4SB 8/10	1.5 (2)	52-21	3-11	4"	2"	
SP4SB 8/15	2.2 (3)	77-33	3-11	4"	2"	
SP4SB 12/7	2.2 (3)	43-19	6-18	4"	2"	
SP4SB 12/13	4 (5.5)	81-36	6-18	4"	2"	
SP6SB 17/7	4 (5.5)	76-35	6-22	6"	2 1/2"	
SP6SB 17/10	5.5 (7.5)	108-50	6-22	6"	2 1/2"	
SP6SB 17/16	9.2 (12.5)	173-80	6-22	6"	2 1/2"	
SP6SB 30/8	7.5 (10)	87-36	8-38	6"	3"	
SP6SB 30/13	11 (15)	142-59	8-38	6"	3"	
SP6SB 42/8	13 (18)	104-42	10-60	6"	3"	
SP6SB 42/14	22 (30)	182-74	10-60	6"	3"	






## SCM model

Model	POWER (hp)	Q Max. (L/min)	H Max. (m)	Voltage (v)	Speed (r.p.m)	Outlet (inch)	Application
SCM - 4A	1	100	46	220	2850	1½"	Poly Carbonate Impeller
SCM - 6A	1.5	100	68	220	2850	1½"	
SCM - 8A	2	100	91	220	2850	1½"	
SCM - 4S	1	140	36	220	2850	1½"	Stainless Steel Impeller
SCM - 6S	1.5	140	55	220	2850	1½"	
SCM - 8S	2	140	73	220	2850	1½"	

www.spc-trading.com

## 4SKM model

Model	POWER (hp)	Q Max. (L/min)	H Max. (m)	Voltage (v)	Speed (r.p.m)	Outlet (inch)	Application
4SKM 100	1	50	52	220	2850	1"	Poly Carbonate Impeller
4SKM 200	2	50	96	220	2850	1"	

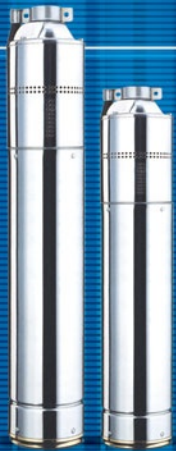

## SVM model



Model	POWER (hp)	Q Max. (L/min)	H Max. (m)	Voltage (v)	Speed (r.p.m)	Outlet (inch)	Application
SVM 1001	1	50	48	220	2850	1"	Poly Carbonate Impeller
SVM 1002	2	50	92	220	2850	1"	

## 6SR model

Model	POWER (hp)	Q Max. (L/min)	H Max. (m)	Voltage (v)	Speed (r.p.m)	Outlet (inch)	Application
6SR 18-14	15	400	226	380	2850	3"	Poly Carbonate Impeller
6SR 18-19	20	400	300	380	2850	3"	
6SR 30-11	25	600	150	380	2850	3"	



## 100QJ & 4SD model

Model	POWER (hp)	Q Max. (L/min)	H Max. (m)	Voltage (v)	Speed (r.p.m)	Outlet (inch)	Application
100 QJD 220	2	50	135	220	2850	1½"	Poly Carbonate Impeller
100 QJD 230	3	50	202	220	2850	1½"	
100 QJD 314	2	67	101	220	2850	1½"	
100 QJD 316	2	67	115	220	2850	1½"	
100 QJD 513	3	133	80	220	2850	2"	
100 QJ 519	4	133	116	380	2850	2"	
4SDM3-23	2	65	140	220	2850	1¼"	
4SDM3-30	3	65	183	220	2850	1¼"	
4SDM6-14	2	110	94	220	2850	1½"	
4SDM6-19	3	110	128	220	2850	1½"	
4SDM10-6	1	200	37	220	2850	2"	
4SDM10-10	2	200	62	220	2850	2"	
4SDM10-14	3	200	86	220	2850	2"	
4SDM15-6	2	300	36	220	2850	2"	
4SDM15-9	3	300	54	220	2850	2"	
4SD8-12	2	133	40	380	2850	2"	
4SD10-9	2	166	27	380	2850	1¼"	
4SD10-12	3	166	38	380	2850	1¼"	



www.spc-trading.com

## 4SP model

Model	POWER (hp)	Q Max. (L/min)	H Max. (m)	Voltage (v)	Speed (r.p.m)	Outlet (inch)	Application
4SPM2 - 18A	1	50	110	220	2850	1¼"	Stainless Steel Impeller
4SPM2 - 23A	1.5	50	141	220	2850	1¼"	
4SPM2 - 33A	2	50	202	220	2850	1¼"	
4SPM3 - 18A	1.5	70	114	220	2850	1¼"	
4SPM3 - 25A	2	70	158	220	2850	1¼"	
4SPM5 - 17A	2	110	109	220	2850	1½"	
4SPM5 - 25A	3	110	160	220	2850	1½"	
4SP5 - 33A	4	110	211	380	2850	1½"	
4SP5 - 44A	5.5	110	281	380	2850	1½"	
4SPM8 - 10A	2	180	60	220	2850	2"	
4SPM8 - 14A	3	180	84	220	2850	2"	
4SPM8 - 7	1.5	3-11m <sup>3</sup> /h	36-14	220	2850	2"	
4SPM8 - 14	3	3-11m <sup>3</sup> /h	72-34	220	2850	2"	
4SP8 - 24A	5.5	180	145	380	2850	2"	
4SP8 - 33A	7.5	180	199	380	2850	2"	

